

Downspout Filter

Specialty Filters

Comprehensive Stormwater Solutions

Bio  Clean
A Forterra Company



OVERVIEW

The Bio Clean Downspout Filter is the industry's leading solution for treatment of roof runoff. This technology is used to treat commercial and industrial rooftops along with highrise buildings, parking structures, and residential buildings.

Available in 3 sizes, this filter can easily adapt to downspouts 2" to 12" in diameter. The filter comes standard with rubber boots that allow for easy installation to the downspout.

Proven since 2003, the Downspout Filter has been used on hundreds of installations throughout the United States. All internal components are constructed of stainless steel.

The sleek in-line design allows the filter to be used in tight spaces. Approved by the IAPMO, this filter can meet all your needs.



PERFORMANCE

93%

REMOVAL
OF TSS

87%


REMOVAL
OF HYDROCARBONS

- EFFECTIVE AT REMOVING METALS, NUTRIENTS, AND BACTERIA (MEDIA TYPE)

ADVANTAGES


- 10-YEAR WARRANTY
- NO NETS OR GEOFABRICS
- SLEEK IN-LINE DESIGN
- HIGH TREATMENT FLOW RATE
- HIGH BYPASS FLOW RATE
- LOW COST

OPERATION

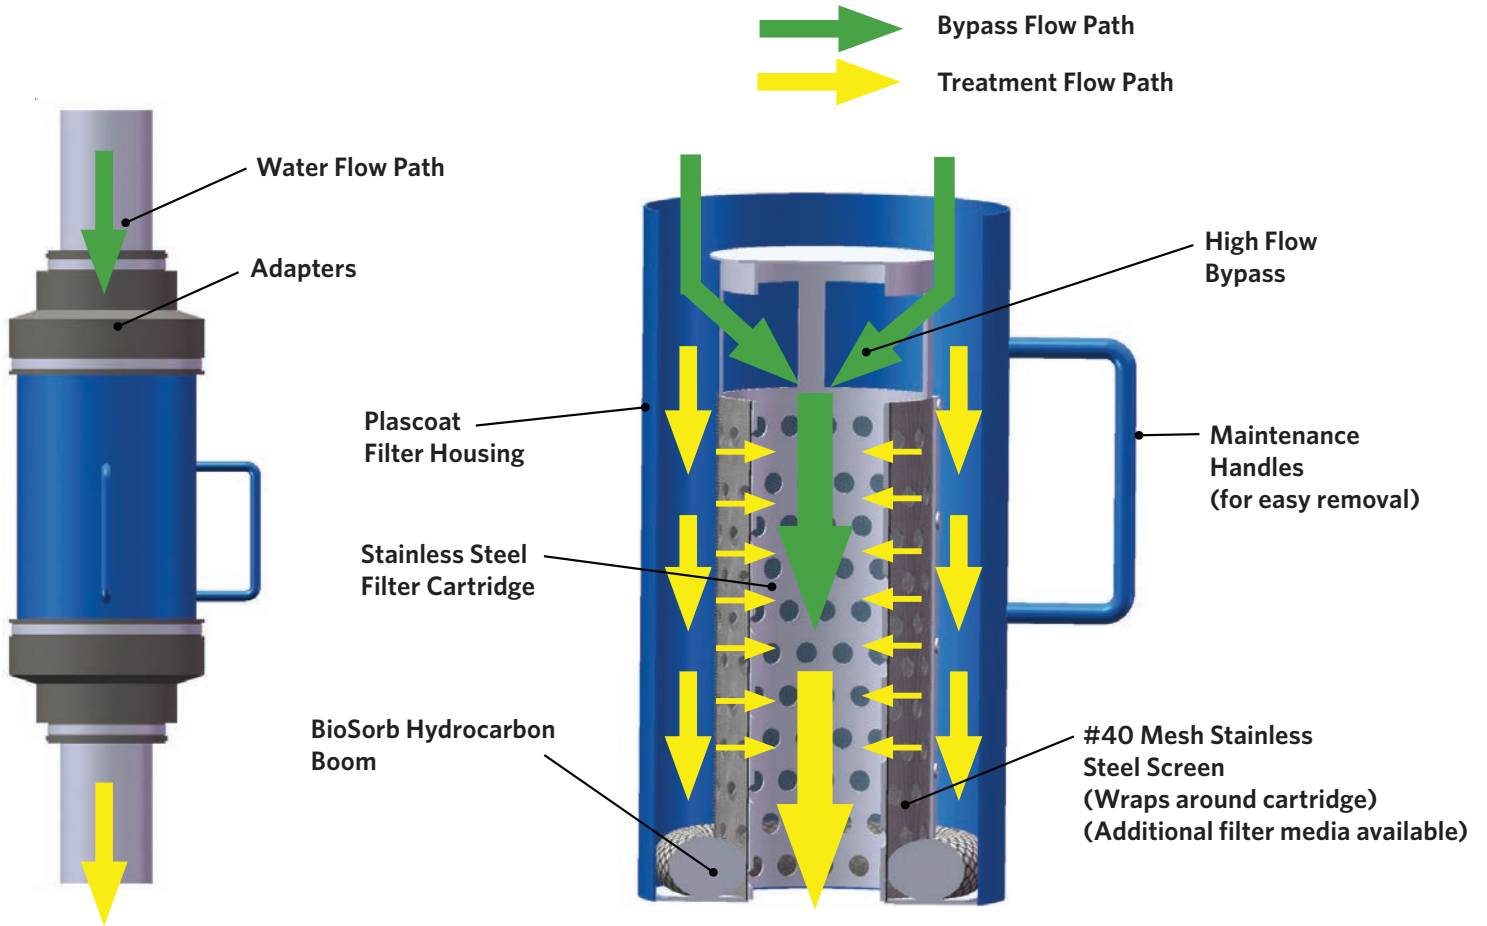

APPROVALS

IAPMO Testing & Approval Listing



SPECIFICATIONS

MODEL #	INLET ID (dia., in.)	FILTER OD (dia., in.)	STORAGE CAP. (cu. ft.)	FILTERED FLOW (gpm)	BYPASS FLOW (gpm)
BC-DF4	4	6.625	0.09	249	566
BC-DF6	6	8.625	0.21	509	1006
BC-DF8	8	8.625	0.21	509	1006
BC-DF10	10	12.75	0.77	1145	2264
BC-DF12	12	12.75	0.77	1145	2264

APPLICATION



Easily adapts to square or rectangular downspouts.

- Commercial
- Residential
- Parking Structures
- Mixed-Use



Fits in-line with iron, steel, or plastic pipe.

Bio Clean
A Forterra Company

398 Via El Centro
Oceanside, CA 92058
855.566.3938
stormwater@forterrabp.com
biocleanenvironmental.com